



More Precision

surfaceCONTROL 3D // 3D sensors for geometry, shape and surface inspections

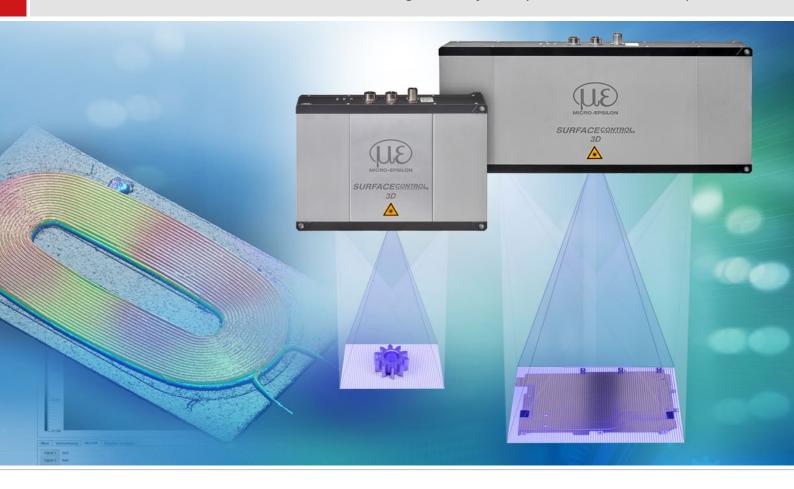


Precise sensor for 3D measurements and surface inspections surfaceCONTROL 3D

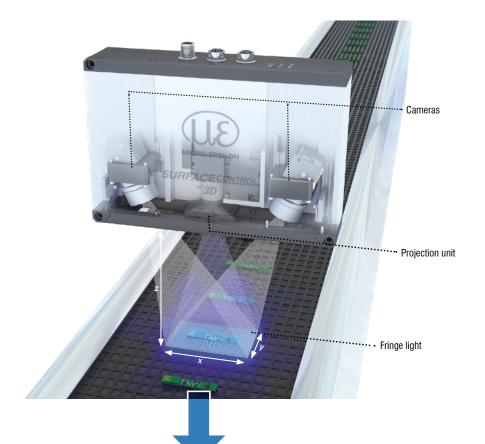


Measuring principle

The surfaceCONTROL 3D sensors work according to the principle of optical triangulation based on fringe projection. Using a matrix projector, a sequence of patterns is projected onto the test object surface. The light of the patterns diffusely reflected by the test object surface is captured by two cameras. The three-dimensional surface of the test object is then calculated from the recorded image sequence and the knowledge of the arrangement of the two cameras to each other.

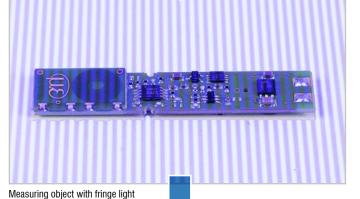


surfaceCONTROL 3D sensors for inline 3D measurement tasks

surfaceCONTROL 3D sensors use individual snapshots to detect objects. The fast measurement combined with high data density allows use in 100% in-line testing during the production process. The superiority of surfaceCONTROL 3D sensors lies in their ability to detect the entire surface in a fraction of a second. The sensors generate a digital 3D image of the entire measuring object and provide significantly more detailed quality information than tactile measurement methods, for example.




Detailed 3D display due to extremely high z-axis resolution



Automated evaluation in Micro-Epsilon software

Content / Model	Description	Page
surfaceCONTROL	Advantages and special features	4 - 7
surfaceCONTROL	Application examples	8 - 9
surfaceCONTROL 32x0	Powerful 3D sensors for industrial measurement tasks	10 - 11
surfaceCONTROL 35x0	High performance 3D sensors for industrial environments	12- 13
surfaceCONTROL	Dimensions and measurement areas	14 - 15
Software	surfaceCONTROL 3DInspect	16 - 17
Accessories	 2D/3D Gateway Industrial Performance Unit Cooling housing Connection cable 	18 - 19

The surface CONTROL 3D sensors provide a wide range of different measurement areas from 30 x 18.5 mm to 240×150 mm. The variety of measurement areas allows the detection of the smallest details and structures as well as of large objects at a large working distance and with high precision.

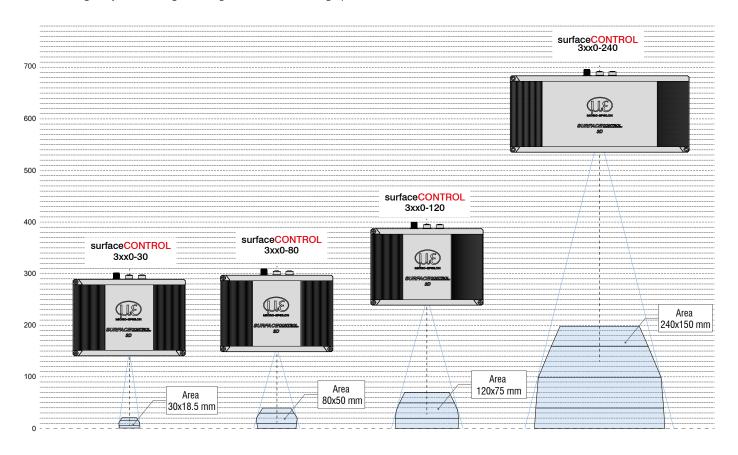

Precise sensor for 3D measurements and surface inspections

surfaceCONTROL 3D

Highest z-axis repeatability up to $0.25 \mu m$

Automated inline 3D measurement for geometry, shape and surface inspections

Up to 2.2 million 3D points / second

Fully integrated industry sensor (IP67) with passive cooling

Real 3D data via latest 3D GigE Vision standard

Easy integration in all common 3D image processing packets



The new generation of high precision inline 3D measurements

The surfaceCONTROL 3D sensors are ideally suited to automated inline inspection of geometry, shapes and surfaces on diffuse reflecting surfaces. The sensors are characterized by their compact design and high measurement accuracy combined with high-speed data processing. With a z-axis repeatability of up to 0.25 μm , the surfaceCONTROL 3D sensors set new standards in high precision 3D measurement technology. This enables reliable detection of even the smallest deviations in flatness and height. Two models cover different measuring fields.

In addition to the fast data output via Gigabit Ethernet, the sensors offer an additional digital I/O interface. The 2D/3D Gateway II supports EtherNet/IP, PROFINET and EtherCAT connections. Powerful software tools enable precise 3D measurements and surface inspection. GigE Vision compatibility also allows easy integration into third-party image processing software. The comprehensive SDK for customer software integration rounds off the software package.

3DInspect




operating mode

Advantages of surfaceCONTROL 3D sensors compared to 2D cameras

Conventional 2D cameras do not recognize depth information when capturing images. If the position of a measuring object changes, errors can occur during evaluation. The advantage of surfaceCONTROL 3D sensors lies in the high-precision measurement of height differences, which are visualized in color by the software. Due to the additional height information generated, the sensors automatically compensate for errors caused by changes in height. As a result, they work much more reliably than cameras, even for objects in different positions. In addition, the surfaceCONTROL 3D sensors have two integrated cameras that are optimally aligned and combine the captured points in a point cloud.

	2D	3D
Analysis of volume and/or shapes	×	~
Contrast information is well recognizable	*	*
Recognition of height variations	×	~
Positioning task / detection in the third dimension	×	*
Component identification	~	~
Presence monitoring of components	~	*
Damage detection	~	~



Gray image with a 2D camera imageNo depth information through the camera image





Image from a 3D sensor Depth information and height deviations from the target value

Point clouds with up to 2.2 million 3D points per second

The surfaceCONTROL 3D achieves acquisition speeds of up to 2.2 million 3D points per second, each point of which has an x, y and z coordinate. This large number of measuring points, the so-called point cloud, is used to generate and visualize inventory data for subsequent analysis and evaluation. Point clouds can have information on reflection and color, and thus reproduce a realistic image. The subsequent processing of captured point clouds consists of generating point clouds of the individual viewpoints and linking them to form an overall point cloud.

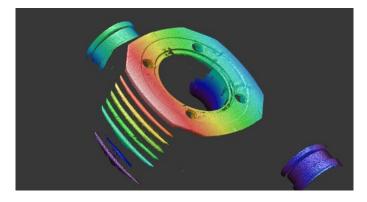


New: high-precision sensor for tiny targets

With its small measurement area of 30 x 18.5 mm, the surface-CONTROL 35x0-30 detects even the finest 3D and surface structures with utmost precision and reliability. Its high z-axis resolution and the precise repeatability make the 3D sensor the most precise on the 3D snapshot sensor market.

In addition, tiny objects with a working distance of 130 mm can be detected while the xy resolution from 16 μ m ensures even more accurate detection.


New: large measurement area with excellent z-precision

With a measurement area up to 245 x 180 mm, the surfaceCONTROL 35x0-240 captures structures and details on larger targets with high precision. Due to their high z-axis measuring range of 240 mm, the sensors are ideal for applications with large measuring volumes. The high z-axis resolution of 4 μ m in combination with the larger measurement area enables maximum precision for a wide range of applications, e.g. for testing bipolar plates for fuel cells.





Precise sensor for 3D measurements and surface inspections surfaceCONTROL 3D

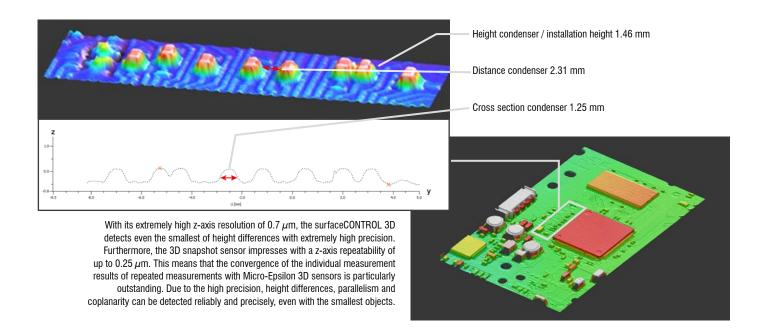

Precise raw data for integrators and image processors

The surfaceCONTROL 3D sensors from Micro-Epsilon are used for a variety of measurement and inspection tasks on matt surfaces. The results can be documented and compared. This allows for important conclusions to be drawn for process improvements. The sensors can be used in offline applications as well as in fully automated operation.

Software integration via Micro-Epsilon's 3D-SDK

3D sensors from Micro-Epsilon are equipped with a user-friendly SDK (Software Development Kit). The SDK is based on the GigE Vision and GenlCam industry standards including the following essential function blocks:

- Network configuration and sensor connection
- Control of data transmission (3D measurement data, video images, profile counters, ...)
- Comprehensive sensor control
- User sets
- Documentation
- C++ example programs
- 3D Viewer

3D SDK at a glance:

- GigE Vision / GenlCam compatible
- Access to all sensor parameters
- Examples included
- Comprehensive documentation











Automation technology in combination with 3D precision sensor technology

Robust hardware combined with an intelligent software concept makes the surfaceCONTROL 3D ideal for use in automation technology. Due to their compact design and low weight, the sensors can be easily mounted on robots and devices. The signal and supply cables are suitable for drag chains and robots.

In factory automation, in autonomous assembly systems or in complex process monitoring - the surfaceCONTROL 3D sensors deliver the most precise results directly to the machine and system control due to their high precision, fast data processing speed and large number of interfaces.



Automatic 100% inline inspection at high speed

The surfaceCONTROL 3D sensors generate a 3D image of an area with just one shot and detect the position of the target underneath. It is therefore not necessary to position the measuring object on a precision measuring table. The 3D snapshots are created in fractions of a second without the need for time-consuming orientation of the measuring object. This reduces the measuring time and enables a 100% inspection in the production line as well as a good/bad evaluation of each individual object.

- Complete measurement with just one 3D snapshot
- No positioning of the measuring object required, automatic alignment by 3DInspect software
- Easy integration and intuitive user concept





Simple and precise at-line inspection


The surfaceCONTROL 3D sensors provide a fast inspection solution for random tests during production. At-line processes are used either for the inspection of individual objects from the production line or for the inspection of defective parts at a special measuring station.

- Not necessary to orientate the target precisely
- Less measuring devices and equipment
- Avoids potential positioning errors


Application examples

surfaceCONTROL 3D


Geometry and shape detection




Flatness inspection of high-precision middle boards of smartphone carrier plates



3D measurement of high precision mechanical parts: distance between the holes, planarity and coplanarity of mounting surfaces




Angle on tooth flanks of a gear wheel




Measurement of the tip angle of the main cutting edge of a drill head and measurement of the internal diameter


Inspection of the smallest of components




Completeness check of electronic components on fitted PCBs



Flatness test of the winding on charging coils

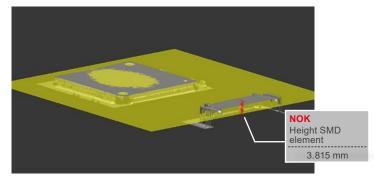


Monitoring of distance and plane-parallelism of assembled elements to each other and to the base surface (e.g. tombstone effect)




Planarity inspection of unpopulated PCB substrates


Defect detection



Determination of shape deviation defects on the front side of injection-molded parts caused by injection of bridges and joining elements on the rear side




Detection of surface defects on a smartphone shell




Flatness measurement of the flange of a gear wheel




Detection and evaluation of breaks on clutch discs



Completeness check of the bridges of a smartphone charging connector plug



Coplanarity measurement of contacts on electrical components



Reliable and high-precision measurement of a 1 μm high step Depiction of a height difference.

3D performance for industrial applications

surfaceCONTROL 3D 32x0

High repeatability up to $0.4 \, \mu \mathrm{m}$


Automated inline 3D measurement for geometry, shape and surface inspections

Acquisition time from 0.3 s

Fully integrated industrial sensor (IP67) with passive cooling

Real 3D data via latest 3D GigE Vision standard

Easy integration in all common 3D image processing packets

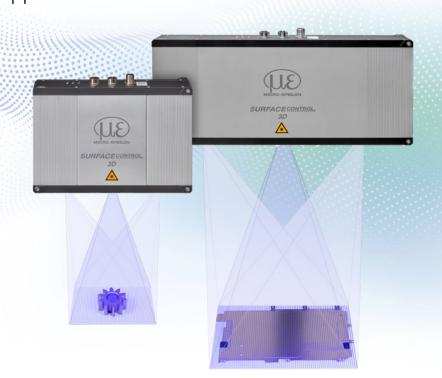

Ideal for industrial 3D applications

The surfaceCONTROL 32x0 3D sensors are ideally suited to automated inline inspection of geometry, shapes and surfaces on diffuse reflecting surfaces. The 3D snapshot sensors are characterized by their compact design and high measurement accuracy combined with high-speed data processing. With a z-axis repeatability of up to $0.4\,\mu\text{m}$, the sensor sets new standards in high precision 3D metrology. This enables reliable detection of even the smallest deviations in flatness and height. Three measurement areas cover different fields of application.

New: larger measurement area with high repeatability

With a measurement area up to 230 x 180 mm, the surfaceCONTROL 32x0-240 captures structures and details on larger targets with high precision. The high z-axis resolution of 5 μ m in combination with the larger measurement area enables maximum precision for a wide range of applications, e.g., for testing bipolar plates.


New: high-precision sensor for the smallest measuring objects


With its small measurement area of 30×18.5 mm, the surface CONTROL 32x0-30 detects even the finest 3D and surface structures with utmost precision and reliability. Thanks to the high z-axis resolution and an xy resolution from $25 \,\mu \text{m}$ combined with precise repeatability, even more accurate detection is possible.

3DInspect functional extension

The surfaceCONTROL 32x0 series is available with the 3DInspect functional extension. For connection to an automation interface, the 3DInspect Automation function extension is enabled with use of the SC3210 sensors, which also includes comprehensive data logging.

Article designation





Height difference measurement of the bore in a gear wheel

Model		SC3200-30	SC3210-30	SC3200-80	SC3210-80	SC3200-120	SC3210-120	SC3200-240	SC3210-240	
	Start of expanded area	26.5 x 17.5 at 124 mm		50 x 44 at 110 mm		78 x 62 at 171 mm		135 x 115 at 340 mm		
Measurement area	Start Start		29.5 x 18 at 127 mm		65 x 47 at 120 mm		100 x 70 at 191 mm		180 x 130 at 380 mm	
Length (x) * width (y)	Mid	30 x 18.5 at 130 mm		75 x 50 at 130 mm		115 x 75 at 206 mm		235 x 150 at 440 mm		
at distance (z)	End	30.5 x 19 at 133 mm		74 x 53 at 140 mm		115 x 79 at 221 mm		235 x 170 at 500 mm		
	End of expanded area	29.5 x 19.5 at 136 mm		70 x 56 at 150 mm		113 x 85 at 241 mm		230 x 180 at 540 mm		
Working distance	Z	130 ±3 mm		$130 \pm 10 \text{ mm}$		206 ±15 mm		440 ±60 mm		
Working distance	extended z	130 ±6 mm		130 ±20 mm		206 ±35 mm		440 ±100 mm		
Resolution	x,y	25 2	27 μm	55 70 <i>μ</i> m		80 100 μm		160 210 μm		
Nesolution	Z 1)	1.0 μm		1.5	1.5 μm		μm	5.0 μm		
Repeatability	$Z(\sigma)^{1)}$	$<$ 0.4 μm		< 0.0	6 μm	< 1.2 μ m		< 1.8 μ m		
Acquisition time 2) 3)		0.3 0.7 s								
Light source				LED						
Supply voltage			24 VDC ±20%							
Max. current consumption	n	0.5 1.5 A								
Digital interfaces		Gigabit Ethernet (GigE Vision / GenlCam)/ PROFINET 4) / EtherCAT 4) / EtherNet/IP 4)								
Digital in-/outputs		4 digital I/Os for which parameters can be set (for external trigger, sensor control, output of sensor states)								
Connection			8-pin M12 socket for Gigabit Ethernet, 12-pin M12 socket for digital I/Os, 4-pin M12 plug for power supply							
Installation	3 mounting holes (installation can be reproduced with centering sleeves)									
Storage		-20 °C +70 °C								
Temperature range	Operation 5)	0 °C +45 °C						0 °C	+40 °C	
Shock (DIN EN 60068-2-	27)			15 g / 6 ms in XY axis, 1000 shocks each						
Vibration (DIN EN 60068-	2 g / 20 500 Hz in XY axis, 10 cycles each									
Protection class (DIN EN	60529)	IP67								
Material		Aluminum housing, passive cooling, external cooling optionally available (see accessories)								
Weight		1.9 kg						2.3	kg	
Control and indicator ele	ments	3 LEDs (for device status, power, data transmission)								
Sensor SDK		Micro-Epsilon 3D sensor SDK								
3D evaluation software					Micro-Epsilon 3DInspect					
Functional extension		-	3DInspect Automation	-	3DInspect Automation	-	3DInspect Automation	-	3DInspect Automation	

⁹ Measured on measuring object with cooperative surface in the center of the measurement area while the EnhancedSNR parameter is enabled wheatured of the infeaturing object with cooperative surface in the enter of the infeaturing in a earlier in Entranced NA paramand a 3x3 mean value filter is used once at a consistent room temperature of (20 \pm 1 °C).

² Duration that the sensor requires for the image acquisition of the pattern projections (without processing and evaluation time).

³ Applies for exposure times < 6,800 μ s

⁴ Connection via 2D/3D gateway interface module

⁹⁾ Max. permissible operating temperature depends on installation scenario, connection and operating mode. In combination with a ventilation unit (art. no. 2105079), continuous measurement operation is possible at ambient temperatures of up to 45 °C (valid for measuring ranges 30, 80 and 120 mm).

Highest 3D performance for industrial applications

surfaceCONTROL 3D 35x0

Highest z-axis repeatability up to 0.25 μ m


Automated inline 3D measurement for geometry, shape and surface inspections

Acquisition time from 0.2 s

Fully integrated industrial sensor (IP67) with passive cooling

Real 3D data via latest 3D GigE Vision standard

Easy integration in all common 3D image processing packets

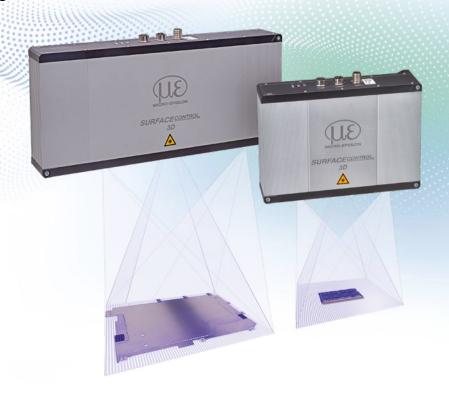

Ideal for high precision 3D measurements

The surfaceCONTROL 35x0 3D sensors are ideally suited to automated inline inspection of geometry, shapes and diffuse reflecting surfaces. The 3D snapshot sensors are characterized by their compact design and high measurement accuracy combined with high-speed data processing. With a z-axis repeatability of up to 0.25 μm , the sensor sets new standards in high precision 3D metrology. This enables reliable detection of even the smallest deviations in flatness and height. Three measurement areas cover different fields of application.

Larger measurement area with highest repeatability

With a measurement area of up to 245 x 180 mm, the surfaceCONTROL 35x0-240 captures structures and details on larger targets with highest precision. The high z-axis resolution of 4 μm in combination with the larger measurement area enables maximum precision for a wide range of applications, e.g., for testing bipolar plates.


New: high-precision sensor for the smallest measuring objects


With its small measurement area of 30×18.5 mm, the surface CONTROL 35x0-30 detects even the finest 3D and surface structures with utmost precision and reliability. Thanks to the high z-axis resolution and an xy resolution from $16 \, \mu \text{m}$ combined with precise repeatability, even more accurate detection is possible.

Available with the 3DInspect functional extension

The surfaceCONTROL 35x0 series is also available with the 3DInspect functional extension. For connection to an automation interface, the 3DInspect Automation function extension is enabled with use of the SC3210 sensors, which also includes comprehensive data logging.

Article designation





Defect detection on metal drill heads

Model		SC3500-30	SC3510-30	SC3500-80	SC3510-80	SC3500-120	SC3510-120	SC3500-240	SC3510-240	
	Start of expanded area		28 x 17.5 at 124 mm		55 x 42 at 110 mm		87.5 x 62.5 at 171 mm		145 x 115 at 340 mm	
Measurement area	Start	29.5 x 18.0 at 127 mm		67.5 x 46 at 120 mm		107.5 x 70 at 191 mm		190 x 130 at 380 mm		
Length (x) * width (y)	Mid	30 x 18.5 at 130 mm		80 x 50 at 130 mm		120 x 75 a	at 206 mm	240 x 150 at 440 mm		
at distance (z)	30.5 x 19.0 at 133 mm		77.5 x 52 a	77.5 x 52 at 140 mm		at 221 mm	245 x 170 at 500 mm			
	End of expanded area	31.0 x 19.5 at 136 mm		75 x 54 at 150 mm		122 x 82.5 at 241 mm		245 x 180 at 540 mm		
N/ 12 P 1	2		130 ±3 mm		130 ±10 mm		206 ±15 mm		440 ±60 mm	
Working distance	extended z	130 ±6 mm		130 ±20 mm		206 ±35 mm		440 ±100 mm		
Deschales	x,y	16 1	18 <i>μ</i> m	35 45 <i>μ</i> m		50 70 μm		110 140 <i>μ</i> m		
Resolution	Z 1)	0.7	μm	1.0 <i>µ</i> m		2.0	μm	4.0	μm	
Repeatability	$Z(\sigma)^{1)}$	< 0.2	5 μm	< 0.	4 μm	< 0.	7 μm	< 1.4 μ m		
Acquisition time 2) 3)					0.2	. 0.4 s				
Light source					LE	ED				
Supply voltage		24 VDC ±20 %								
Max. current consumption	n	0.5 2.5 A								
Digital interfaces		Gigabit Ethernet (GigE Vision / GenlCam) / PROFINET 4) / EtherCAT 4) / EtherNet/IP 4)								
Digital in-/outputs		4 digital	I I/Os for which	parameters ca	n be set (for ex	ternal trigger, se	ensor control, o	utput of sensor	states)	
Connection	12					in M12 socket for Gigabit Ethernet, 2-pin M12 socket for digital I/Os, I-pin M12 plug for power supply				
Installation	3 mounting holes (installation can be reproduced with centering sleeves)									
T .	-20 +70 °C									
Temperature range	Operation 5)	0 +45 °C 0 +40 °C								
Shock (DIN EN 60068-2-2	((DIN EN 60068-2-27) 15 g / 6 ms in XY axis, 1000 shocks each									
Vibration (DIN EN 60068-	2-2-6) 2 g / 20 500 Hz in XY axis, 10 cycles each									
Protection class (DIN EN	60529)	IP67								
Material		Aluminum housing, passive cooling; external cooling optionally available (see accessories)								
Weight		1.9 kg 2.3 kg						kg		
Control and indicator eler	ments	3 LEDs (for device status, power, data transmission)								
Sensor SDK		Micro-Epsilon 3D sensor SDK								
3D evaluation software		Micro-Epsilon 3DInspect								
Functional extension		3DInspect 3DIns - Automation Autom				-	3DInspect Automation	-	3DInspect Automation	


¹⁾ Measured on measuring object with cooperative surface in the center of the measurement area while the EnhancedSNR parameter is enabled and a 3x3 mean value filter is used once at a consistent room temperature of (20 \pm 1 $^{\circ}$ C).


²⁾ Duration that the sensor requires for the image acquisition of the pattern projections (without processing and evaluation time).
³⁾ Applies for exposure times < 6,800 µs
⁴⁾ Connection via 2D/3D gateway interface module


⁵⁾ Max. permissible operating temperature depends on installation scenario, connection and operating mode. In combination with a ventilation unit (art. no. 2105079), continuous measurement operation is possible at ambient temperatures of up to 45 °C (valid for measuring ranges 30, 80 and 120 mm)


Dimensions and measurement areas


surfaceCONTROL 3D

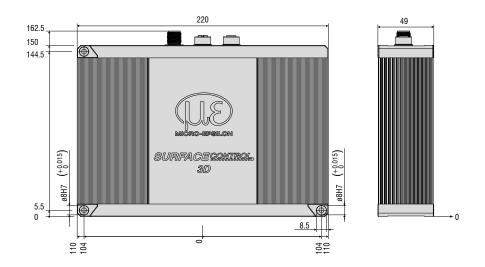


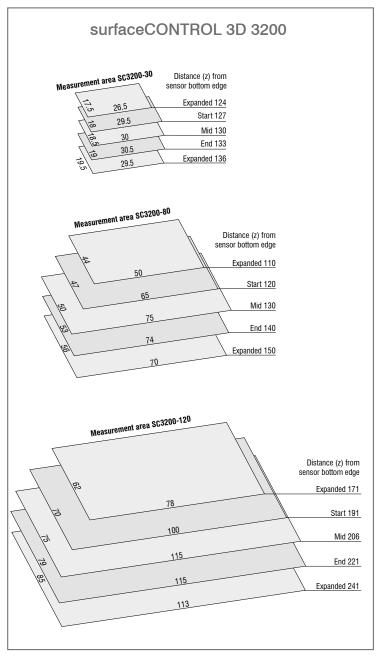

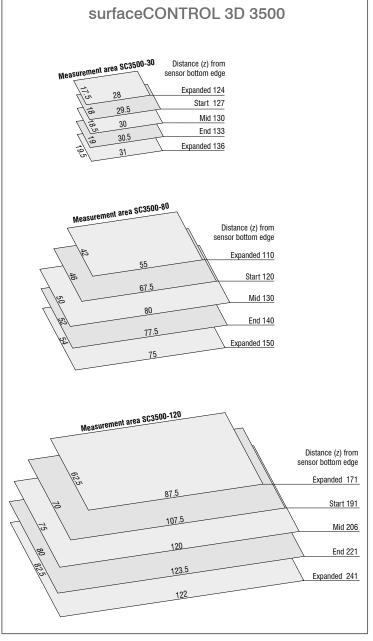

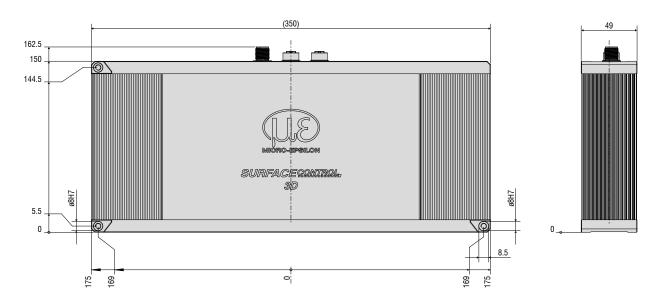

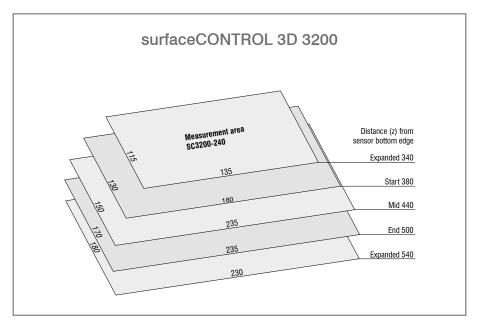

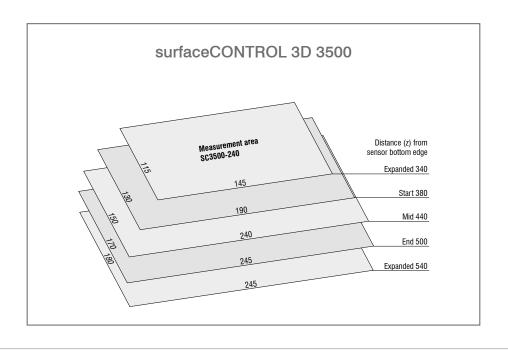

Software for 3D measurement and inspection tasks

3DInspect

Intuitive user interface

Real 3D evaluation, not just 2.5D

Automatic output of measured values for inline operation

Object extraction in 3D

Direct feedback with algorithms


Compatible with all 3D sensors from Micro-Epsilon





The 3DInspect software is a powerful tool for sensor parameter set up and industrial measurement tasks. This software transmits the measurement data from the sensor via Ethernet and provides the data in three-dimensional form. This 3D data is further processed, evaluated and assessed with 3DInspect measuring programs on the PC and, if necessary, logged and transmitted via Ethernet to a control unit. Furthermore, the software enables the storage of 3D data.


Valid3D technology from Micro-Epsilon vs. conventional 2.5D systems

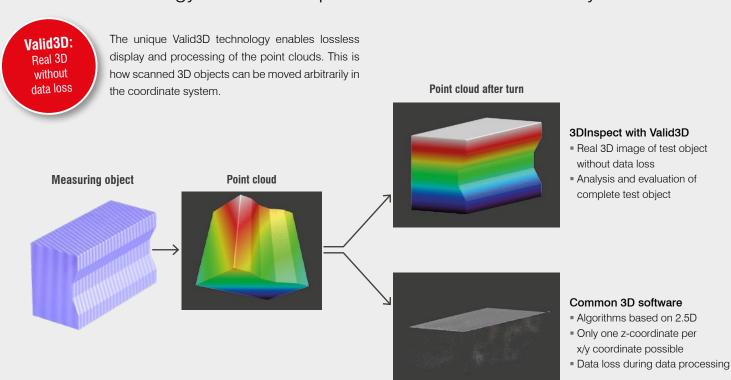


Data preprocessing

With data preprocessing, the point cloud can be adjusted before evaluation. This enables, for example, the correction of moving components, so that the point cloud for the evaluation is always in the same position.


In addition, it is possible to refine the point cloud before evaluation, to apply filters to highlight features, to cut away irrelevant points or to set sections.












Processing of data



Setting cuts


Data evaluation

For data analysis, numerous programs are available to locate and measure characteristics. These can be edges, spheres or holes, for example. Both the evaluation of the 3D data, and a measurement or evaluation directly in previously generated sections is possible.

The 2D and 3D objects can also be set in relation to each other using combinations, for example to determine distances between a sphere and a plane or the angle between two edges.



Distance





Accessories & Connection cables

Accessories for continuous cooling

A ventilation unit is available for continuous cooling of the surfaceCONTROL 3D 3500 and 3200 sensors. The ventilator is housed in an industrial-grade IP67 enclosure and is particularly quiet. The ventilation unit can be used for sensors with measuring ranges of 30, 80 and 120 mm.




Industrial Performance Unit

Powerful computer platform for 3DInspect

The Industrial Performance Unit offers integrated interfaces for connection to the industrial fieldbuses PROFINET, EtherCAT and Ethernet/IP. Prepared device description files allow easy integration into the respective control environment. For reliable communication, the sequential control model developed by Micro-Epsilon is available for smooth commissioning. It is available as an implementation example for typical controllers.

- High-performance solution for 3D measurement tasks
- Full compatibility and inline capability for customer applications
- Intuitive 3DInspect software with Valid3D technology
- Efficient commissioning of Micro-Epsilon sensors
- Industrial-grade hardware with passive cooling

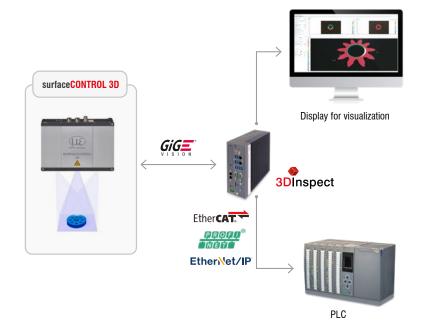

2D/3D Gateway for 3DInspect

Profinet / EtherCAT / EtherNetIP

The 2D/3D gateway is used when the 3DInspect evaluation is running on a customer computer. Up to 4 computers with 3DInspect can be connected to one gateway. Operation of more than one computer requires a switch. The 2D/3D Gateway communicates with the computers via Ethernet Modbus TCP. The resultant values are then converted to PROFINET, EtherCAT or EtherNet/IP. The customer carries out the parameter setup with a detailed instruction manual. The gateway can also be parameterized in advance at the factory.



Models

6414142 2D/3D Gateway Fieldbus coupler, configurable for PROFINET, EtherNet/IP and EtherCAT
6414142.001 2D/3D Gateway, pre-parameterized Pre-parameterized to customer log and IP addresses
6414160 Industrial Performance Unit IPC ready to use for 3DInspect in combination with all 3D sensors

Supply cable ECR3000-x

Power supply cable suitable for drag chains and robots Cable length: 2 / 5 / 10 / 15 / 20 / 25 / 35 m

PCR3000-x Multi-function cable

Cable for optional connection of digital inputs and outputs (TTL or HTL); suitable for drag chains and robots Cable length: $2/5/10/15/20/25/35~\rm m$



Ethernet connection cable SCR3000X-x

Cable for parameter setting, image and 3D data transmission; suitable for drag chains and robots Cable length: $2/5/10/15/20/25/35~\rm m$



Other accessories

Other accessories						
Art. no.	Model	Description				
2420103	PS3000	Table power pack				
2105079	Air cooling for surfaceCONTROL 3D	Cooling accessories for temperatures up to 45 °C				
2961007	Tripod surfaceCONTROL 3D	Tripod for mounting and adjusting 3D sensors				
2961008	Articulated arm for surfaceCONTROL	Articulated arm for mounting and adjusting 3D sensors				
2961011	Articulated arm for surfaceCONTROL 240	Articulated arm for mounting and aligning the 240 series sensors				
3007579	Adapter plate for surfaceCONTROL 3D	Mounting bracket				
3008681	Adapter plate for surfaceCONTROL 240	Mounting bracket for measuring range 240 mm				

Innovative 3D Technologies from Micro-Epsilon



scanCONTROL

- Precise laser line scanners for 3D point clouds
- Red laser & patentedBlue Laser Technology
- Up to 2048 points per profile
- Measuring rates up to 10,000 kHz
- Numerous measuring ranges



surfaceCONTROL 2500

- Inspection of matt surfaces with high accuracy
- Large measuring fields up to 575 x 435 x 300 mm³
- Detection of different surface form defects
- Objective evaluation of the deviations
- Continuous process monitoring
- Optical error marking with back projection



reflectCONTROL Sensor

- Measurement of shiny, flat components
- Fast, full-surface inspection
- High-precision measurements, flatness deviation in the submicron range
- Large measuring field