










More Precision

confocalDT // Confocal chromatic sensor system






 25kHz	Fast confocal controller: up to 25kHz
 INTERFACE	Ethernet / EtherCAT / RS422 / PROFINET / Ethernet/IP / Analog
	Fast surface compensation
	Configuration via web interface
	Submicrometer resolution
	Multi-layer thickness measurement
	Robust design with passive cooling



confocalDT IFC2461 systems are used for complex distance and thickness measurements. The IFC2461 controller is equipped with enhanced, optimized optical components for measuring rates up to 25 kHz without having to use an external light source. The high light intensity enables reliable measurements on difficult surfaces, e.g., on matt black objects or for multi-layer thickness measurement of glass. The active exposure regulation feature in the CCD line is for accurate, fast surface compensation on changing surfaces during dynamic measurement processes.

The controller can be operated with any IFS sensor and is available as a standard version for distance and thickness measurements or as a multi-peak version for multi-layer measurements.

Due to a user-friendly web interface, no additional software is necessary to configure the controller and the sensors. Data output is via Ethernet, EtherCAT, RS422 or analog output.

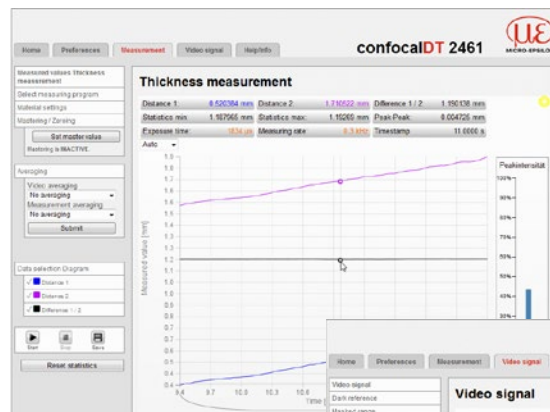

All settings are performed in the web interface. For thickness measurements, materials are stored in an expandable materials database.

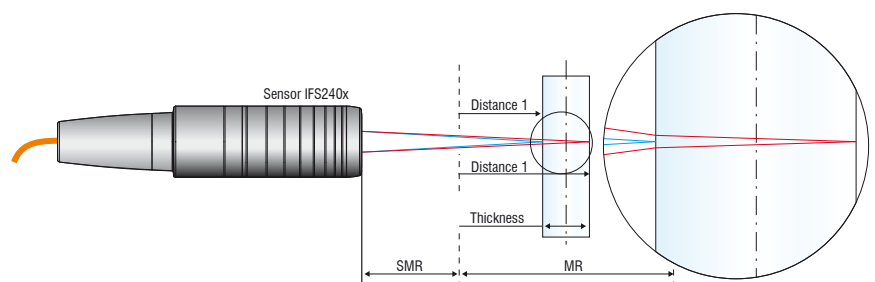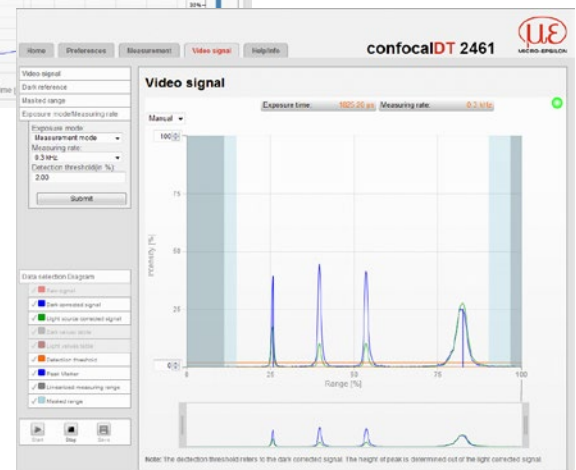


Model		IFC2461	IFC2461MP
Resolution	Ethernet/EtherCAT	1 nm	
	RS422	18 bit	
	analog	16 bits (teachable)	
Measuring rate		continuously adjustable from 100 Hz to 25 kHz	
Linearity		typ. < ± 0.025 % FSO (depends on sensor)	
Multi peak measurement		1 layer	5 layers
Light source		internal white LED	
No. of characteristic curves		up to 20 characteristic curves for different sensors per channel, selection via table in the menu	
Permissible ambient light ¹⁾		30,000 lx	
Synchronization		yes	
Supply voltage		24 VDC ± 15 %	
Power consumption		approx. 10 W	
Signal input		sync-in / trig-in; 3x encoder (A, B, index)	
Digital interface		Ethernet; EtherCAT; RS422; PROFINET ²⁾ ; EtherNet/IP ²⁾	
Analog output		Current: 4 ... 20 mA; voltage: 0 ... 10 V / -10 ... +10 V (16 bit D/A converter)	
Switching output		Error1-Out, Error2-Out	
Digital output		sync-out	
Connection	optical	pluggable optical fiber via E2000 socket, length 2 m ... 50 m, min. bending radius 30 mm	
	electrical	3-pin supply terminal strip; Encoder connection (15-pin, HD-sub socket, max. cable length 3 m); RS422 connection socket (9-pin, Sub-D, max. cable length 30 m); 3-pin output terminal strip (max. cable length 30 m); 12-pin I/O terminal strip (max. cable length 30 m); RJ45 socket for Ethernet / EtherCAT (max. cable length 100 m)	
Installation		free-standing, DIN rail mounting	
Temperature range	Storage	-20 ... +70 °C	
	Operation	+5 ... +50 °C	
Shock (DIN EN 60068-2-27)		15g / 6 ms in XYZ axis, 1000 shocks each	
Vibration (DIN EN 60068-2-6)		2 g / 20 ... 500 Hz in XYZ axis, 10 cycles each	
Protection class (DIN EN 60529)		IP40	
Material		Aluminum	
Weight		approx. 2.2 kg	
Compatibility		compatible with all confocal/DT sensors	
No. of measurement channels		1	
Control and display elements		ON/OFF multifunction button (as well as dark alignment and reset to factory setting after 10 s); 4x LEDs for intensity, range, status, supply voltage	
Features		particularly light-intensive	

FSO = Full Scale Output

¹⁾ Illuminant: light bulb²⁾ Optional connection via interface module (see accessories)


IFC2461 controller

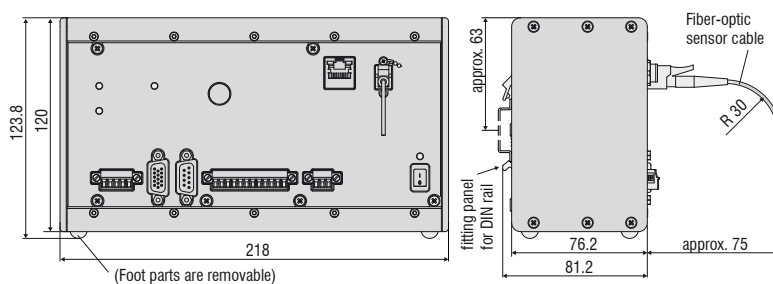

System design


The confocalDT system consists of:

- Sensor IFS240x
- Controller IFC24xx
- Fiber optic cable C24xx

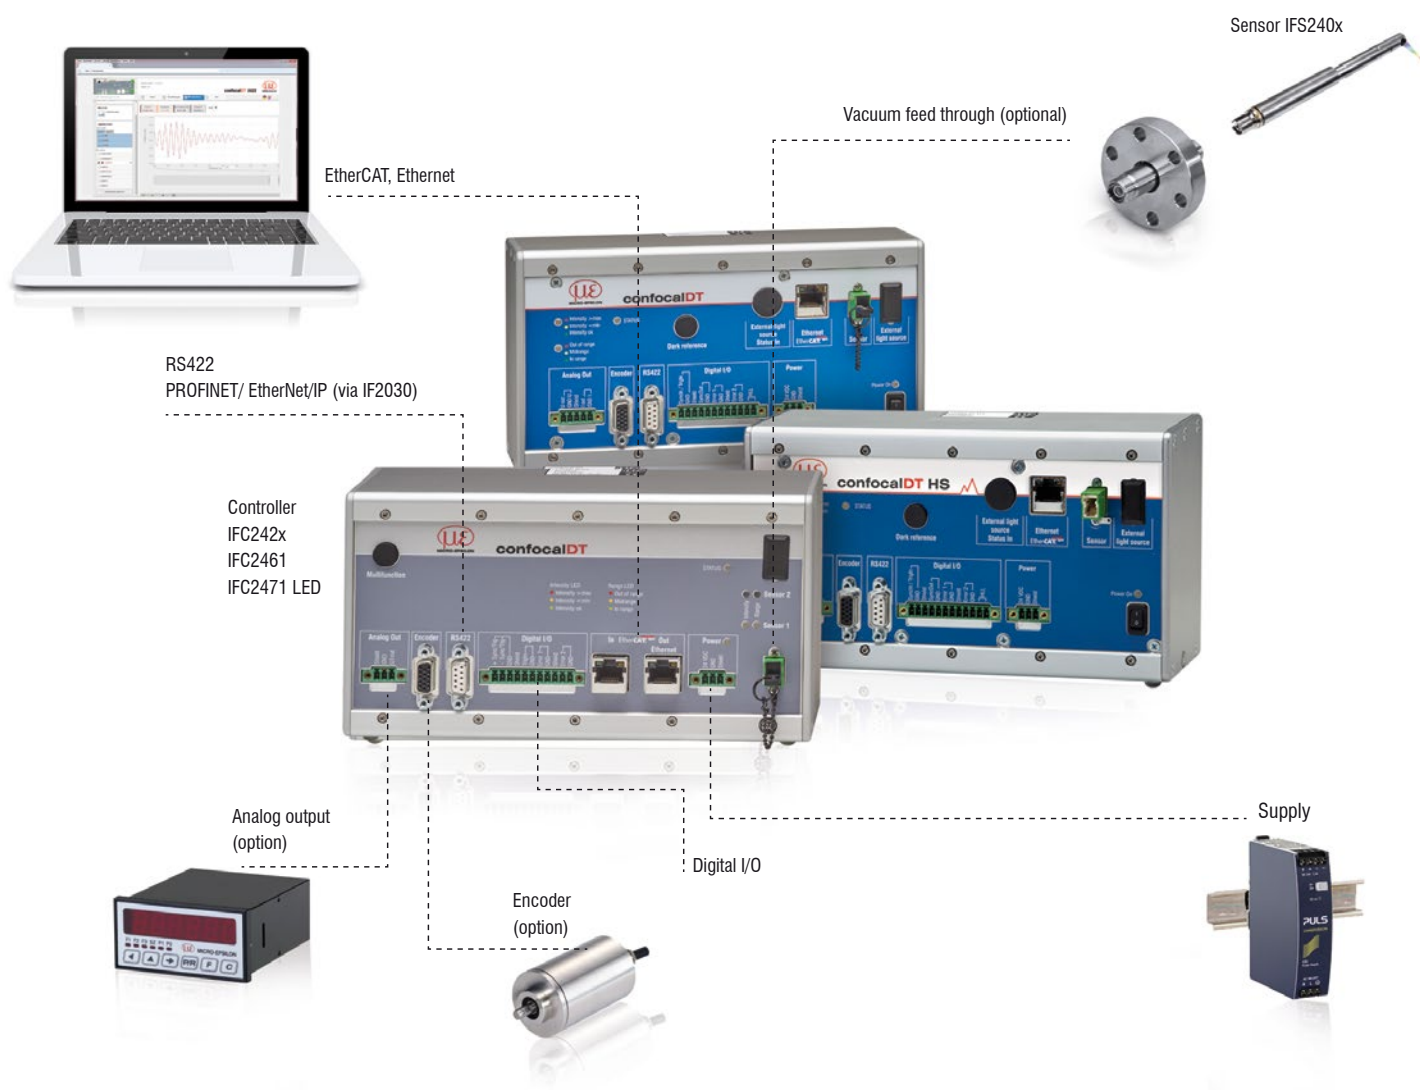

Customer-specific modifications


Application examples are often found where the standard versions of the sensors and the controllers are performing at their limits. To facilitate such special tasks, it is possible to customize the sensor design and to adjust the controller accordingly. Common requests for modifications include changes in design, mounting options, customized cable lengths and modified measuring ranges.

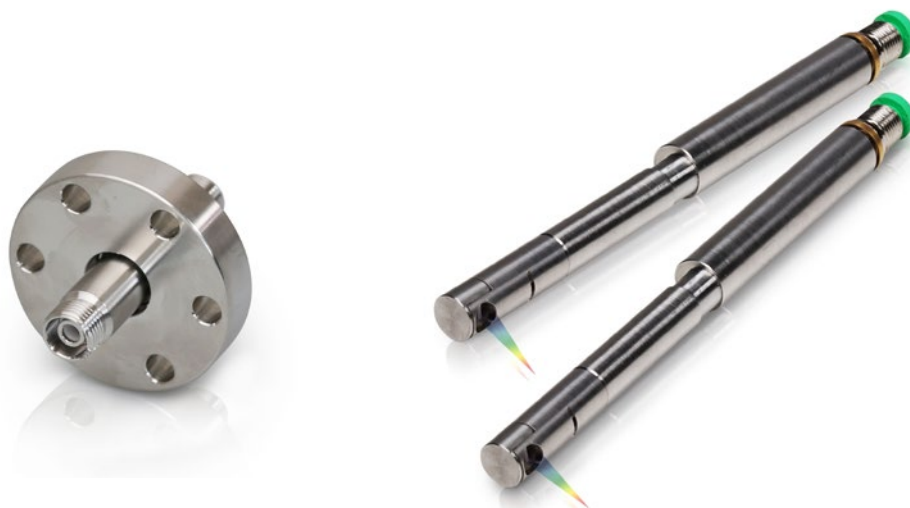


Possible modifications

- Sensors with connector
- Cable length
- Vacuum suitability up to UHV
- Specific lengths
- Customer-specific mounting options
- Optical filter for ambient light compensation
- Housing material
- Measuring range / Offset distance


Vacuum setup

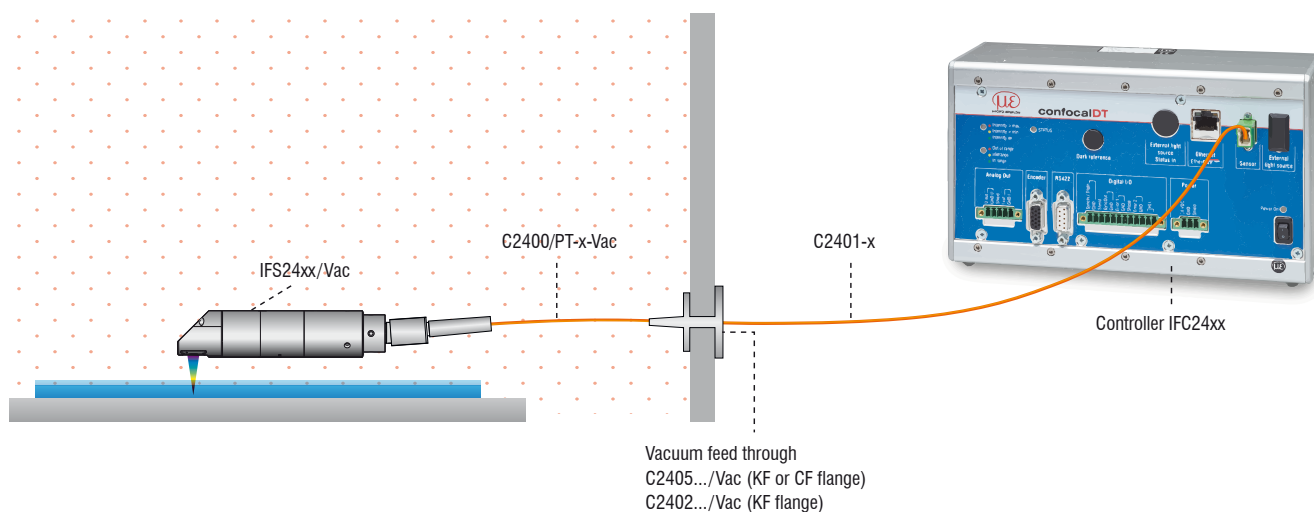


Accessories: mounting adapter
MA2402 for sensors 2402

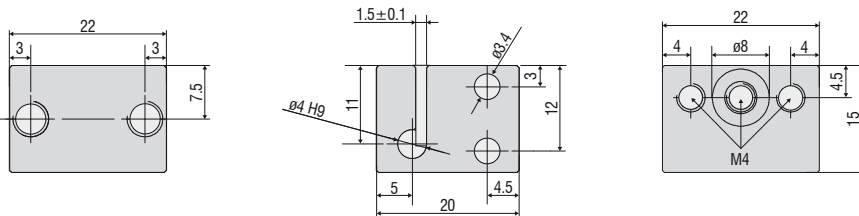

Accessories: mounting adapter
MA2403 for sensors 2403

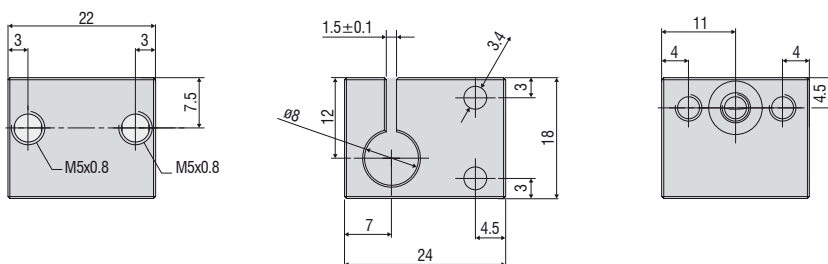


Accessories: mounting adapter
MA2404-12 for sensors IFS2404-2 / IFS2404/90-2 / IFS2407-0,1

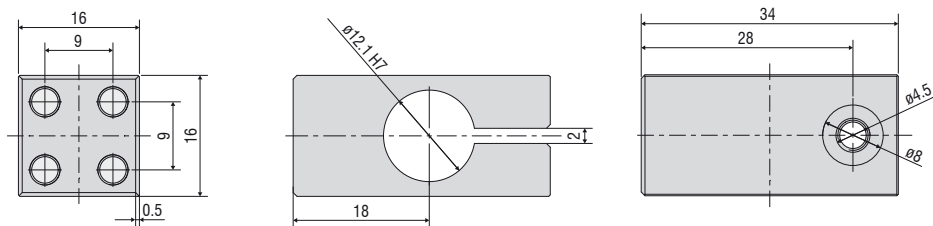


Accessories: mounting adapter
MA2400 for sensors IFS2405 / IFS2406 / IFS2407 (consisting of a mounting block and a mounting ring)

Mounting block

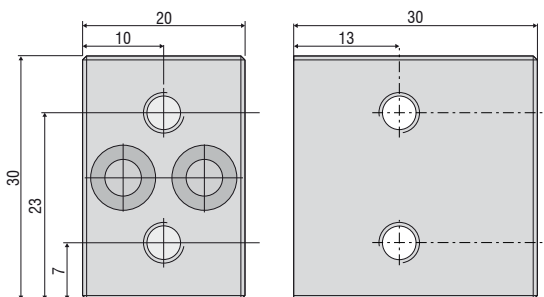

Mounting ring

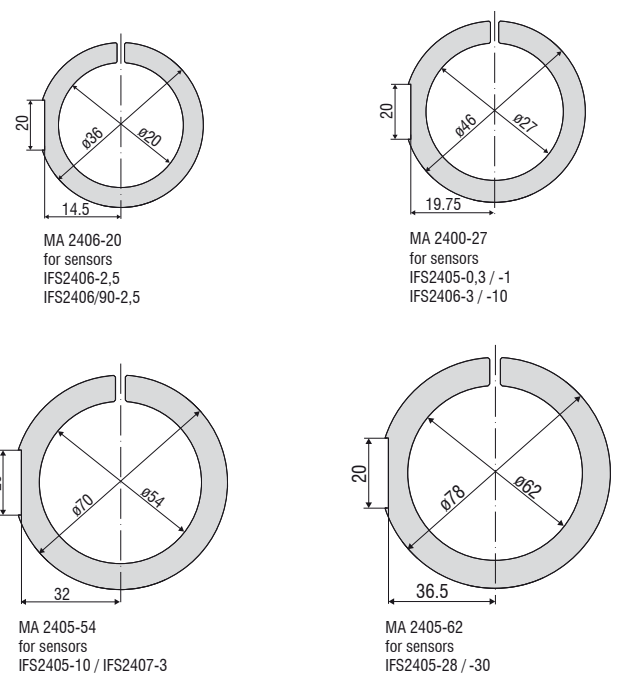

Accessories

Software

IFD24xx-Tool	Software demo tool included
--------------	-----------------------------

Accessories light source

IFL2422/LE	Lamp module for IFC2422
IFL24x1/LED	Lamp module for IFC24x1

Cable extension for sensors

CE2402 cable with 2x E2000/APC connectors	
CE2402-x	Extension for optical fiber (3 m, 10 m, 13 m, 30 m, 50 m)
CE2402-x/PT	Extension for optical fiber with protection tube for mechanical stress (3 m, 10 m, customer-specific length up to 50 m)

Cable for IFS2404 sensors

C2404-x	Optical fiber with FC/APC and E2000/APC connectors Fiber core diameter 20 μm (2 m)
---------	--

Cables for IFS2405/IFS2406/2407-0,1 sensors

C2401 cable with FC/APC and E2000/APC connectors	
C2401-x	Optical fiber (3 m, 5 m, 10 m, customer-specific length up to 50 m)
C2401/PT-x	Optical fiber with protection tube for mechanical stress (3 m, 5 m, 10 m, customer-specific length up to 50 m)
C2401-x (01)	Optical fiber core diameter 26 μm (3 m, 5 m, 15 m)
C2401-x(10)	Drag-chain suitable optical fiber (3 m, 5 m, 10 m)

C2400 cable with 2x FC/APC connectors

C2400-x	Optical fiber (3 m, 5 m, 10 m, customer-specific length up to 50 m)
C2400/PT-x	Optical fiber with protection tube for mechanical stress (3 m, 5 m, 10 m, customer-specific length up to 50 m)
C2400/PT-x-Vac	Optical fiber with protection tube suitable for use in vacuum (3 m, 5 m, 10 m, customer-specific length up to 50 m)

Cable for IFS2407/90-0,3 sensors

C2407-x	Optical fiber with DIN connector and E2000/APC (2 m, 5 m)
---------	---

Vacuum feed through

C2402/Vac/KF16	Vacuum feed through with optical fiber, 1 channel, vacuum side FC/APC non-vacuum side E2000/APC, clamping flange KF 16
C2405/Vac/1/KF16	Vacuum feed through on both sides FC/APC socket, 1 channel, clamping flange type KF 16
C2405/Vac/1/CF16	Vacuum feed through on both sides FC/APC socket, 1 channel, flange type CF 16
C2405/Vac/6/CF63	Vacuum feed through FC/APC socket, 6 channels, flange type CF 63


Other accessories

SC2471-x/USB/IND	Connector cable IFC2461/71, 3 m, 10 m, 20 m
SC2471-x/IF2008	Connector cable IFC2461/71-IF2008, 3 m, 10 m, 20 m
PS2020	Power supply 24V / 2.5A
EC2471-3/OE	Encoder cable, 3m
IF2030/PNET	Interface module for PROFINET connection
IF2030/ENETIP	Interface module for EtherNet/IP connection


Optical fiber

Temperature range : -50 °C to 90 °C


Bending radius: 30/40 mm

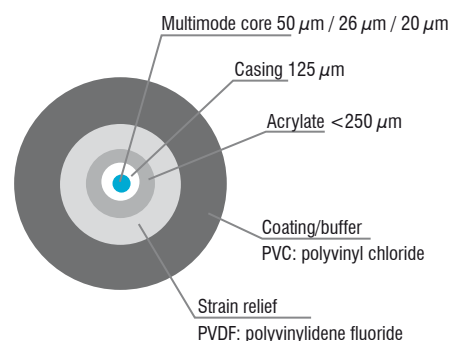


E2000/APC standard connector

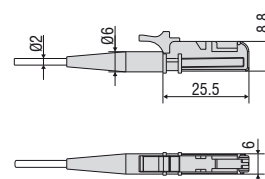

FC/APC standard connector



DIN connector



Sensors and Systems from Micro-Epsilon




Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement




Measuring and inspection systems for metal strips, plastics and rubber

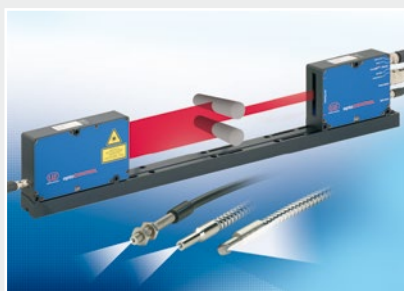

Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers

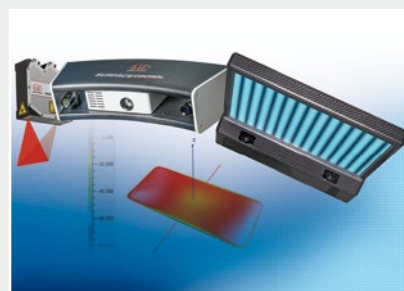

3D measurement technology for dimensional testing and surface inspection